


Electric Deadbolt for automatic gate – 28800 series



- **Surface mounting**
- **Housing in stainless steel, on request painted steel**
- **20mm diameter steel bolt – 60mm extension**
- **24Vdc – Peak current 5A; Holding current 750mA**
- **Power supply available on demand**
- **Mechanical override**

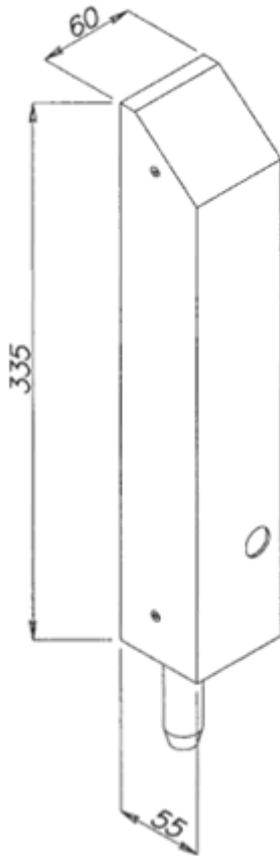

Art. 28800

Lock body in stainless steel, aluminium, and steel with anti-corrosion treatment

Casing in stainless steel.

Mechanical lock with 4 throws and European style cylinder (through-hole both sides) - Supplied without cylinder.

Weather protection of cylinder bore by means of rubber seal

Deadbolt anti-jemmy device with secure positive deadlocking in closed position.

Power Supply: 24 Vdc

Peak current: 5 A; holding current: 750/900 mA

Application: high security electric deadbolt for automatic gates

Packaging: supplied with flat fixing plate for welding

